


XPoI 1710~2690MHz 65° 18dBi 0°~10° Manual or by optional RCU (Remote Control Unit) Antenna

Electrical specifications

Frequency Range(MHz)	1710~2690			
	1710~1880	1920~2200	2200~2500	2500~2690
Polarization	±45°			
Gain (dBi)	17.2	17.5	17.8	18
Horizontal 3dB beamwidth (°)	69	66	65	63
Vertical 3dB beamwidth (°)	7.5	6.5	6	5.8
Front-to-back ratio (dB)	Typ. ≥28			
Cross-polar ratio (dB)	≥15(±60°Typical≥10)			
Electrical downtilt (°)	0~10			
Sidelobe suppression (dB) (First sidelobe above main beam)	0°...5°...10° 16...15...14	0°...5°...10° 16...15...15	0°...5°...10° 15...15...15	0°...5°...10° 15...15...14
VSWR	<1.5			
Isolation: intra-system (dB)	≥28			
Intermodulation IM3 (2x43dBm carrier)	≤-150dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	200			
RET Model	TY-ICUB20 (Replaceable, Not included)			
RET Protocol	AISG 2.0 SRET			
Lightning protection	DC Ground			

Mechanical specifications

Connector	2x7/16DIN-Female
Connector position	Bottom
Heightxwidthxdepth (mm)	1360x160x80
Packing size (mm)	1850x210x155
Antenna weight (kg)	7.7
Installation kit weight (kg)	4.1
Packing weight (kg)	13.4
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	268/142/285
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~15
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

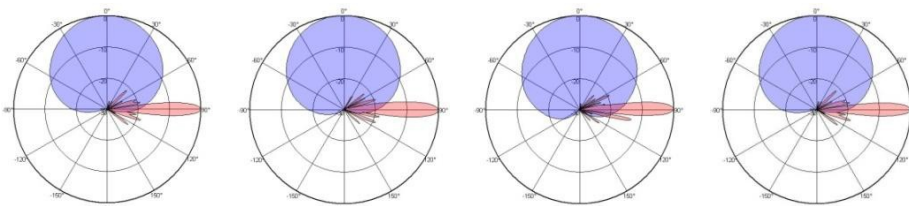

1710~1880MHz

1920~2200MHz

2200~2500MHz

2500~2690MHz

