


XPoI 1710~2170MHz 33° 20.5dBi 0°~10° Manual or by optional RCU (Remote Control Unit) Antenna

Electrical specifications			
Frequency Range(MHz)	1710~2170		
	1710~1880	1850~1990	1920~2170
Polarization	±45°		
Gain (dBi)	20	20.3	20.5
Horizontal 3dB beamwidth (°)	36	33	30
Vertical 3dB beamwidth (°)	7.5	7	6.5
Front-to-back ratio (dB)	≥25		
Cross-polar ratio (dB)	≥15(±15°≥10)		
Electrical downtilt (°)	0~10		
Sidelobe suppression (dB) (First sidelobe above main beam)	0°...5°...10° 16...15...14		
VSWR	<1.5		
Isolation: intra-system (dB)	≥28		
Intermodulation IM3 (2x43dBm carrier)	≤-150dBc		
Impedance (Ω)	50		
Max. power per input (W) @50°C	300		
RET Model	TY-RCUB20 (External, Not included)		
RET Protocol	AISG 2.0 SRET		
Lightning protection	DC Ground		

Mechanical specifications	
Connector	2x7/16DIN-Female
Connector position	Bottom
Heightxwidthxdepth (mm)	1360x320x105
Packing size (mm)	1625x420x2 05
Antenna weight (kg)	14.12
Installation kit weight (kg)	5.3
Packing weight (kg)	22.2
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	514/140/574
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~10
Operating temperature (°C)	-40~60
Mounting hardware (mm)	Φ50~Φ115

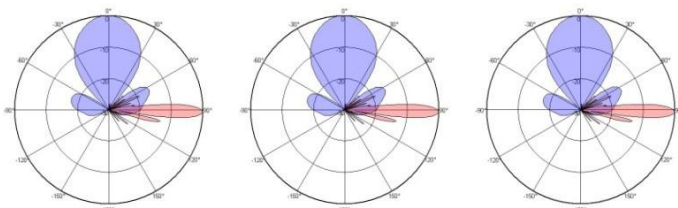

1710~1880MHz 1850~1990MHz 1920~2170MHz

