


**XXPol 1710~2690MHz×2 65° 19.5dBi 0°~6° Manual or by optional RCU (Remote Control Unit)**

**Antenna**

Electrical specifications				
Frequency Range(MHz)	1710~2690 ×2			
	1710~1880	1920~2200	2200~2500	2500~2690
Polarization	±45°			
Gain (dBi)	19.2	19.3	19.5	19.2
Horizontal 3dB beamwidth (°)	68	66	65	63
Vertical 3dB beamwidth (°)	5	4.5	4	3.8
Front-to-back ratio (dB)	≥25			
Cross-polar ratio (dB)	≥15(Typically ±60° ≥10)			
Electrical downtilt (°)	0~6			
Sidelobe suppression (dB) (First sidelobe above main beam)	0°...3°...6° 16...15...15	0°...3°...6° 16...15...15	0°...3°...6° 15...15...15	0°...3°...6° 15...15...15
VSWR	<1.5			
Isolation: intra-system (dB)	≥28			
Intermodulation IM	≤-150 dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	200			
RET Model	TY-ICUB20 (Replaceable, Not Included)			
RET Protocol	AISG 2.0 SRET			
Lightning protection	DC Ground			

Mechanical specifications	
Connector	4x7/16DIN-Female
Connector position	Bottom
Heightxwidthxdepth (mm)	1980x320x80
Packing size (mm)	2390x410x185
Antenna weight (kg)	20.2
Installation kit weight (kg)	5.5
Packing weight (kg)	29.15
Wind load (N,at 150km/h)	796/240/796
Frontal/Lateral/Rearside	
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~10
Operating temperature (°C)	-40~60
Mounting hardware (mm)	Φ50~Φ115

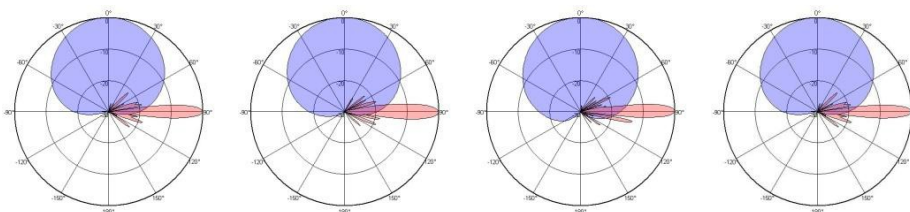


1710~1880 MHz

1920~2200 MHz

2200~2500 MHz

2500~2690 MHz

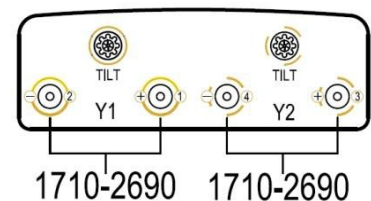

1710-2690

1710-2690