


**XXXPol 698~960MHz/1710~2690MHz×2 65°/65° 16.8/18dBi 0°~10°/0°~10° Integrated RCU(Remote Control Unit) Antenna,with Bias Tee Integrated**

Electrical specifications						
Frequency Range(MHz)	698~960		1710~2690 × 2			
	698~824	824~960	1710~1920	1920~2200	2200~2500	2500~2690
Polarization	±45°					
Gain (dBi)	16.3	16.8	17.3	17.5	17.8	18
Horizontal 3dB beamwidth (°)	68	63	66	64	62	60
Vertical 3dB beamwidth (°)	8.7	7.4	7.6	6.7	6.2	5.7
Front-to-back ratio (dB)	≥25					
Cross-polar ratio (dB)	Typically ≥15(±60°≥8)					
Electrical downtilt (°)	0~10		0~10			
Sidelobe suppression (dB) (First sidelobe above main beam)	Typically: 0°...5°...10° 18...17...16		Typically: 0°...5°...10° 18...16...15			
VSWR	<1.5					
Isolation: intra-system (dB)	≥25					
Intermodulation IM3 (2x43dBm carrier)	≤-150dBc					
Impedance (Ω)	50					
Max. power per input (W) @50°C	400		200			
RET Model	Internal motor ,Internal Smart Bias-T from +45 port 698~960MHz Band					
RET Protocol	AISG 2.0 SRET					
Lightning protection	DC Ground					

Mechanical specifications	
Connector	6x4.3-10-Female
Connector position	Bottom
Heightxwidthxdepth (mm)	2680x355x165
Packing size (mm)	3015x460x260
Antenna weight (kg)	34.7
Installation kit weight (kg)	5.5
Packing weight (kg)	46
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	1156/350/1373
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~8
Operating temperature (°C)	-40~60
Mounting hardware (mm)	Φ50~Φ115

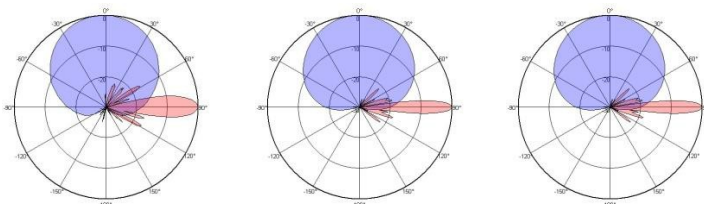

698~960MHz

1710~2690MHz

1710~2690MHz

