


0.6m, Ultra High Performance, Single-Polarized, 12.75-13.25GHz

Electrical Specifications

Frequency (GHz)	12.75-13.25
Polarization	Single (V or H)
Gain , Low (dBi)	35.8
Gain , Mid (dBi)	36
Gain, Top (dBi)	36.2
BeamWidth (deg)	2.7
Cross-POL. Discrimination_XP D (dB)	30
F/B Ratio (dB)	62
VSWR (max)	1.3
Regulatory Compliance	ETSI EN 302 217-4-2V 1.5.1 Range1, Class3

Mechanical Specifications

Diameter (m)/(ft)	0.6m/2ft
Antenna Color	Pantone Cool Gray 1C
Wave-guide Size	153 IEC-R120
Radome Options	Molded
Azimuth Adjustment	Coarse : 360 ° Fine : ±15°
Elevation Adjustment	Coarse : ±10 ° Fine : ±15°
Diameter of Mounting Pole (mm)/(in)	Φ51~Φ114mm/2~4.5in
Wind Velocity Survival Rating (m/s)	67
Wind Velocity Operational (m/s)	30
Ice-load (mm)/(in)	25.4mm/1in
Operational Temperature (°C)/(°F)	-45~+60°C/-49~140°F
Axial Force (N)	1218
Side Force (N)	601
Twisting Moment (N•m)	505
Packaging	Carton
L×W×H (mm)/(in)	750x750x440mm/29.5x29.5 x 17in
Gross Weight/Net Weight (kg)/(lb)	16kg/11kg/35lb/24lb

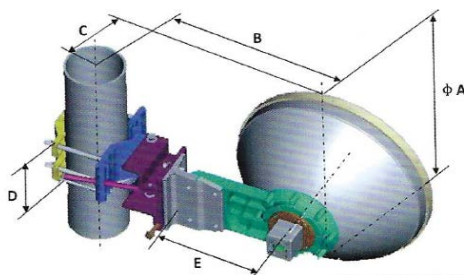

Dimensions (mm)	
A	655
B	412
C	265
D	115
E	232
F	NA

Radio Mount Chart	Code
Remec Rectangular	01
Remec Round	02
Dragonwave	03
Exalt	04
Solectek	05
Ceregon	06
Bridgewave	07